LP8
Technical specifications

Stepless by Guldmann

Functions

Lifting capacity	:	350 kg
Lifting speed	:	0.07 m/sec
Lifting height	:	0-3000 mm
Operation		
Electric	:	Operating panel
Emergency stop	:	Electronic
Emergency lowering	:	Mechanical
Safety lists	:	Mechanical/electric safety lists

Weight

Own weight	:	650 kg

Materials

Materials	:	Aluminium and powder coated / electro-galvanized / hot-galvanized steel
Colour	:	Grey RAL 7037

Item No.	A	B
309110	2275 mm	1000 mm
309112	2475 mm	1200 mm
309114	2675 mm	1400 mm
309116	2875 mm	1600 mm
309120	3433 mm	2000 mm
309123	3883 mm	2300 mm
309126	4334 mm	2600 mm
309130	4933 mm	3000 mm

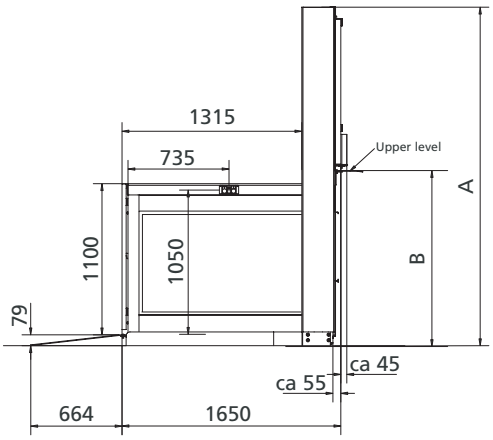

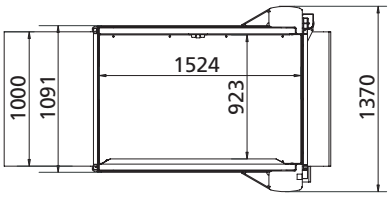



Electrical parts

Door motor	:	24V DC
Frequency	:	50Hz
Hydraulic motor	:	230V, 1,1kW, 1400 r/min.
Voltage	:	230V/10A
Control current	:	24V AC
Heating cable cassette (accessories)	:	220W

Hydraulic unit

Working pressure	:	max. 86 Bar
Oil	:	0-1.6 m: min. 4,5 litres 2-3 m: min. 8 litres

Application

Indoor and outdoor temperature	:	–40°C - +50°C (At temperatures below the freezing point heating cable cassette is required)

Accessories/ miscellaneous : Key switch on operating panels
Extension cable set for external motor housing
Heating cable cassette
Remote control
Sides and doors with perforated steel plates

Marking

The product is manufactured in compliance with the Council Directive 2006/42/EC of May 17th 2006 on machinery and amending Directive 95/16/EC.

Item number/model

3091xx	:	LP8
30916100-L	:	Automatic door, lower level, left
30916100-R	:	Automatic door, lower level, right
30916300-L	:	Automatic door, upper level, left
30916300-R	:	Automatic door, upper level, right

Classification

According to ISO 9999	:	18 30 06

V. Guldmann A/S
Graham Bells Vej 21-23A
DK-8200 Aarhus N
Tel. +45 8741 3100
Fax +45 8741 3131
E-mail info@guldmann.com
www.guldmann.com

© Guldmann GB-1508/11/12